


E 431

Raccordi diritti con Estremità Femmina
 Female Stud Couplings
 Gerade Aufschraubverschraubungen

ISO 1179-1 / ISO 8434-1

Filettatura: BSP cilindrica (DIN ISO 228) - Thread: BSP cyl. (DIN ISO 228) - Gewinde: BSP zyl. (DIN ISO 228)

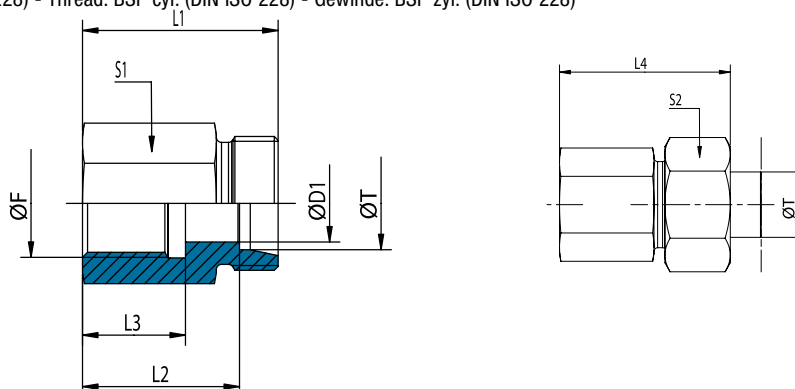

SERIE Series Reihe	Pressione Pressure Druck	Ø T	CODICE Solo Corpo Part no. Body Only Bestell-Nr. ohne Überwurfmutter	DESCRIZIONE Description Bestellzeichen	Ø F	S1	S2	Ø D1	L1	L2	L3	L4
L	PN 315	6	E 431 8 106 000 1OM	E 431 - 106 L	G 1/8"	14	14	4	26	19	12	34
L	PN 315	8	E 431 8 108 000 1OM	E 431 - 108 L	G 1/4"	19	17	6	31	24	17	39
L	PN 315	10	E 431 8 110 000 1OM	E 431 - 110 L	G 1/4"	19	19	8	32	25	17	40
L	PN 315	10	E 431 8 110 110 1OM	E 431 - 110 L	G 3/8"	22	19	8	33	26	17	41
L	PN 315	10	E 431 8 110 113 1OM	E 431 - 110 L	G 1/2"	27	19	8	37	30	20	45
L	PN 315	12	E 431 8 112 000 1OM	E 431 - 112 L	G 3/8"	22	22	10	33	26	17	41
L	PN 315	12	E 431 8 112 113 1OM	E 431 - 112 L	G 1/2"	27	22	10	37	30	20	45
L	PN 315	15	E 431 8 115 000 1OM	E 431 - 115 L	G 1/2"	27	27	12	38	31	20	46
L	PN 315	18	E 431 8 118 000 1OM	E 431 - 118 L	G 1/2"	27	32	15	38	30,5	20	47
L	PN 160	22	E 431 8 122 000 1OM	E 431 - 122 L	G 3/4"	32	36	19	43	35,5	22	52
L	PN 160	28	E 431 8 128 000 1OM	E 431 - 128 L	G 1"	41	41	24	45,5	38	24,5	54,5
L	PN 160	35	E 431 8 135 000 1OM	E 431 - 135 L	G 1 1/4"	50	50	30	51,5	41	26,5	62,5
L	PN 160	42	E 431 8 142 000 1OM	E 431 - 142 L	G 1 1/2"	55	60	36	53,5	42,5	28,5	65,5
S	PN 400	6	E 431 9 106 000 1OM	E 431 - 106 S	G 1/4"	19	17	4	33	26	17	41
S	PN 400	8	E 431 9 108 000 1OM	E 431 - 108 S	G 1/4"	19	19	5	33	26	17	41
S	PN 400	10	E 431 9 110 000 1OM	E 431 - 110 S	G 3/8"	24	22	7	34	26,5	17	43
S	PN 400	12	E 431 9 112 000 1OM	E 431 - 112 S	G 3/8"	24	24	8	34	26,5	17	43
S	PN 400	14	E 431 9 114 000 1OM	E 431 - 114 S	G 1/2"	27	27	10	40	32	20	50
S	PN 400	16	E 431 9 116 000 1OM	E 431 - 116 S	G 1/2"	27	30	12	40	31,5	20	50
S	PN 315	20	E 431 9 120 000 1OM	E 431 - 120 S	G 3/4"	36	36	16	45	34,5	22	56
S	PN 315	25	E 431 9 125 000 1OM	E 431 - 125 S	G 1"	41	46	20	49,5	37,5	24,5	61,5
S	PN 315	30	E 431 9 130 000 1OM	E 431 - 130 S	G 1 1/4"	50	50	25	55,5	42	26,5	68,5
S	PN 250	38	E 431 9 138 000 1OM	E 431 - 138 S	G 1 1/2"	60	60	32	59,5	43,5	28,5	74,5

Raccordi completi finale -Z al posto di -1OM

Complete fittings ending with -Z as final code, instead of -1OM


Bei Komplettverschraubungen Code -Z an Stelle von -1OM verwenden

E 431

Raccordi diritti con Estremità Femmina
 Female Stud Couplings
 Gerade Aufschraubverschraubungen

ISO 9974-1 / ISO 8434-1

Filettatura: metrica cilindrica (DIN 13) - Thread: metric cyl. (DIN 13) - Gewinde: metrisch zyl. (DIN 13)

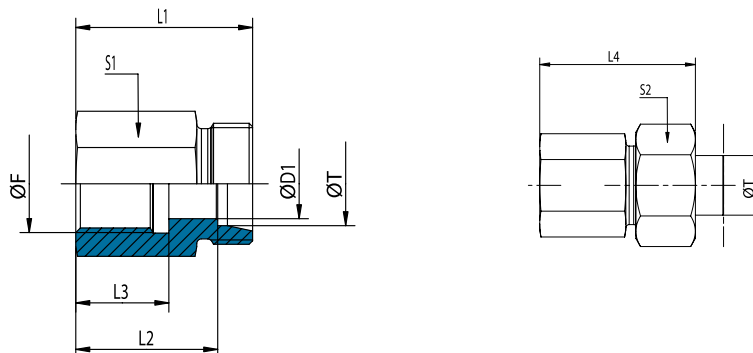

SERIE Series Reihe	Pressione Pressure Druck	Ø T	CODICE Solo Corpo Part no. Body Only Bestell-Nr. ohne Überwurfmutter	DESCRIZIONE Description Bestellzeichen	Ø F	S1	S2	Ø D1	L1	L2	L3	L4
L	PN 315	6	E 431 8 306 000 1OM	E 431 - 306 L	M 10x1	14	14	4	26,5	19,5	12,5	34,5
L	PN 315	8	E 431 8 308 000 1OM	E 431 - 308 L	M 12x1,5	17	17	6	31	24	17	39
L	PN 315	10	E 431 8 310 000 1OM	E 431 - 310 L	M 14x1,5	19	19	8	32	25	17	40
L	PN 315	12	E 431 8 312 000 1OM	E 431 - 312 L	M 16x1,5	22	22	10	33	26	17	41
L	PN 315	15	E 431 8 315 000 1OM	E 431 - 315 L	M 18x1,5	24	27	12	35	28	17	43
L	PN 315	18	E 431 8 318 000 1OM	E 431 - 318 L	M 22x1,5	27	32	15	37	29,5	19	46
L	PN 160	22	E 431 8 322 000 1OM	E 431 - 322 L	M 26x1,5	32	36	19	42	34,5	21	51
S	PN 400	6	E 431 9 306 000 1OM	E 431 - 306 S	M 12x1,5	17	17	4	33	26	17	41
S	PN 400	8	E 431 9 308 000 1OM	E 431 - 308 S	M 14x1,5	19	19	5	33	26	17	41
S	PN 400	10	E 431 9 310 000 1OM	E 431 - 310 S	M 16x1,5	22	22	7	34	26,5	17	43
S	PN 400	12	E 431 9 312 000 1OM	E 431 - 312 S	M 18x1,5	24	24	8	35	27,5	17	44
S	PN 400	14	E 431 9 314 000 1OM	E 431 - 314 S	M 20x1,5	27	27	10	39	31	19	49
S	PN 400	16	E 431 9 316 000 1OM	E 431 - 316 S	M 22x1,5	30	30	12	39	30,5	19	49
S	PN 315	20	E 431 9 320 000 1OM	E 431 - 320 S	M 27x2	36	36	16	45	34,5	22	56

Raccordi completi finale -Z al posto di -1OM

Complete fittings ending with -Z as final code, instead of -1OM

Bei Komplettverschraubungen Code -Z an Stelle von -1OM verwenden

Articoli di basso consumo su richiesta

Slow moving articles available on request

Artikel mit geringem Verbrauch (auf Anfrage)